


NEW FLAG BRACKET

- No assembly required making the door simpler to install.
- Incorporates both standard and low headroom.

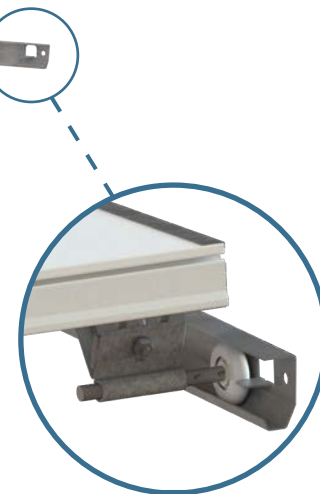


SAFETY ROLLER "DOOR-STOP"

Simple bend out "door-step" tab that eliminates any chance of the door rolling out of the horizontal track.




SAFE TO HANDLE

- Smooth and safe "hard-rolled" track edges prevent cuts or minor injuries.
- Safe for installers to use.
- Safe for homeowners.

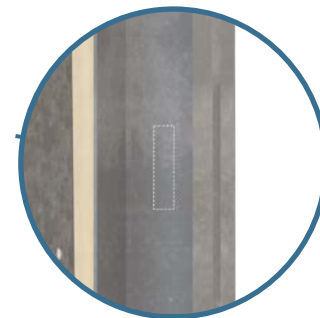

"KNOCK-OUT" SIDE LOCK

Easy knockout tabs makes the addition of Side Lock for manual door operation instant.

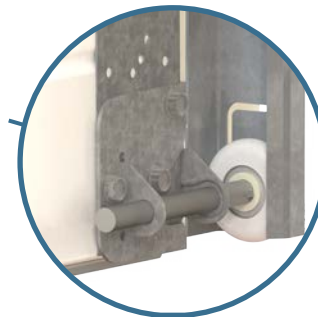

NEW BOTTOM ROLLER BRACKET

Moves the roller closer to the bottom of the door alleviating any section contact with the weatherstrip as it travels through the curve.

SYMMETRICAL TRACK FEATURES & BENEFITS

Revolutionary Design. Safe, Fast and Easy to Install

QUICKER AND SIMPLER INSTALLATION

- Fewer components to secure making symmetrical track faster and easier to install, up to 30 minutes.
- 16Ga track sets, consist of two pair of symmetrical 45 degree curved galvanized track interchangeable for left and right sides.
- Easy to follow step by step install instructions.

HEADROOM REQUIREMENTS

10" radius track provides greater flexibility for a variety of situations.

Standard Headroom: without operator - 10.25"
with operator - 12.25"

Low Headroom: without operator - 7"
with operator - 9"

OTHER FEATURES AND BENEFITS

- Bull-nosed track edges for safer handling and install.
- Pre-punched notches, tabs, and holes for hardware saves valuable time.
- Flag bracket requires no assembly for easy installation, and is suitable for both standard and low headroom.

EASY TO SHIP AND STORE

- Each pair of tracks are nested together and automatically banded to one another making shipping, storage and inventory extremely simple.
- All doors over 8'H x 16'W require reinforced track.